

Series 213 Stainless Steel Gate Valve - BS EN10226-1 (Screwed)



APPLICATION


* For Potable Water, Sea Water,
Corrosive Fluid

* On/Off function

PRESSURE RATING

16 bar working pressure
24 bar Test Pressure

SPECIFICATIONS

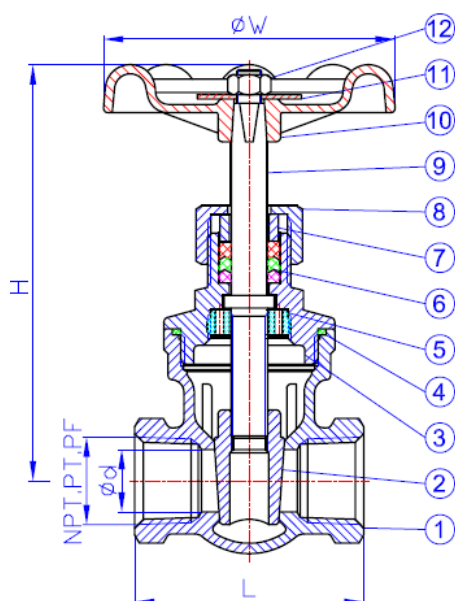

MAJOR COMPONENT

REF	PARTS	MATERIALS
1	Body	316S.S. (BSEN 10088)
2	Disc	316S.S. (BSEN 10088)
3	Bonnet	316S.S. (BSEN 10088)
4	Gasket	PTFE
5	Whorl Gasket	304 Stainless Steel
6	Packing	PTFE
7	Gland	304 Stainless Steel
8	Cap Nut	316S.S. (BSEN 10088)
9	Stem	316S.S. (BSEN 10088)
10	Handwheel	Aluminium
11	Name Plate	Aluminium
12	Nut	304 Stainless Steel

DIMENSIONS (in mm)

DN	15	20	25	32	40	50
L	55	60	65	75	85	95
H	100	107	110	130	147	170
W	70	70	80	80	90	100
Weight	0.41kg	0.52kg	0.64kg	0.98kg	1.42kg	2.10kg

WATERFRONT FLUID CONTROLS WATERFRONT ENGINEERING SERVICES

Unit 6, Elderpark Workspace, 100 Elderpark
Street, Glasgow, G51 3TR.

Tel: (44) 0141-5856750 Fax: (44) 0141-5856751

Website:

www.waterfrontfluidcontrols.co.uk

www.waterfrontengservices.co.uk