

Series 861S Y Strainer



Product Feature

- ♦ Robust and high quality ductile iron body
- ♦ Streamlined flow to minimize pressure loss
- ♦ Perforated stainless steel screen
- ♦ Epoxy coated body to prevent corrosion
- ♦ Quick removal cap for easy screen cleaning

Material of construction

Item	Parts	Material Standard
1	Body	Ductile iron EN-GJS-500-7 with epoxy
2	Screen	Stainless steel BSEN 10088 1.4401
3	Cap	Ductile iron EN-GJS-500-7 with epoxy
4	Bolts	Stainless Steel A2-70 (1.4301)

Design

Pressure rating	16 bar
Temperature rating	0 to Max 80°C
Connection	BS EN 10266 (BS21)

Testing

Body Testing pressure	24 bar
-----------------------	--------


Dimension

Size	DN20 3/4"	DN25 1"	DN32 1 1/4"	DN40 1 1/2"	DN50 2"
L	115	115	137	160	191
H	82	82	100	120	130
H1	172	172	190	230	250

Body Marking


(DN) PN16

* (DN) denote valve size

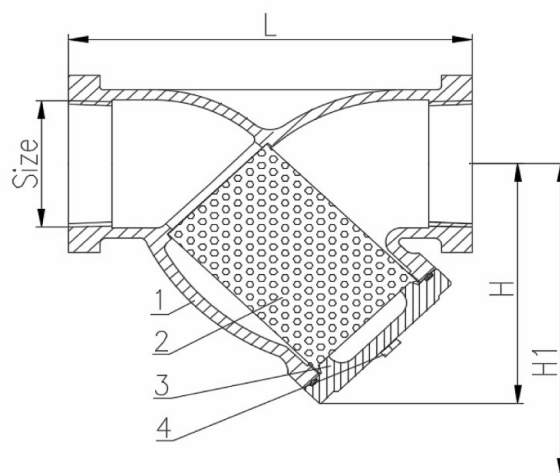

WATERFRONT FLUID CONTROLS
WATERFRONT ENGINEERING SERVICES

Suite 8, Maritime House, 143 Woodville Street Glasgow, G51 2RQ
 Tel: (44) 0141-4277266 Fax: (44) 0141-4272706

Website: www.waterfrontfluidcontrols.co.uk / www.waterfrontengservices.co.uk